


ALTOCUT-CT SERIES

CT260F/360F



Specification

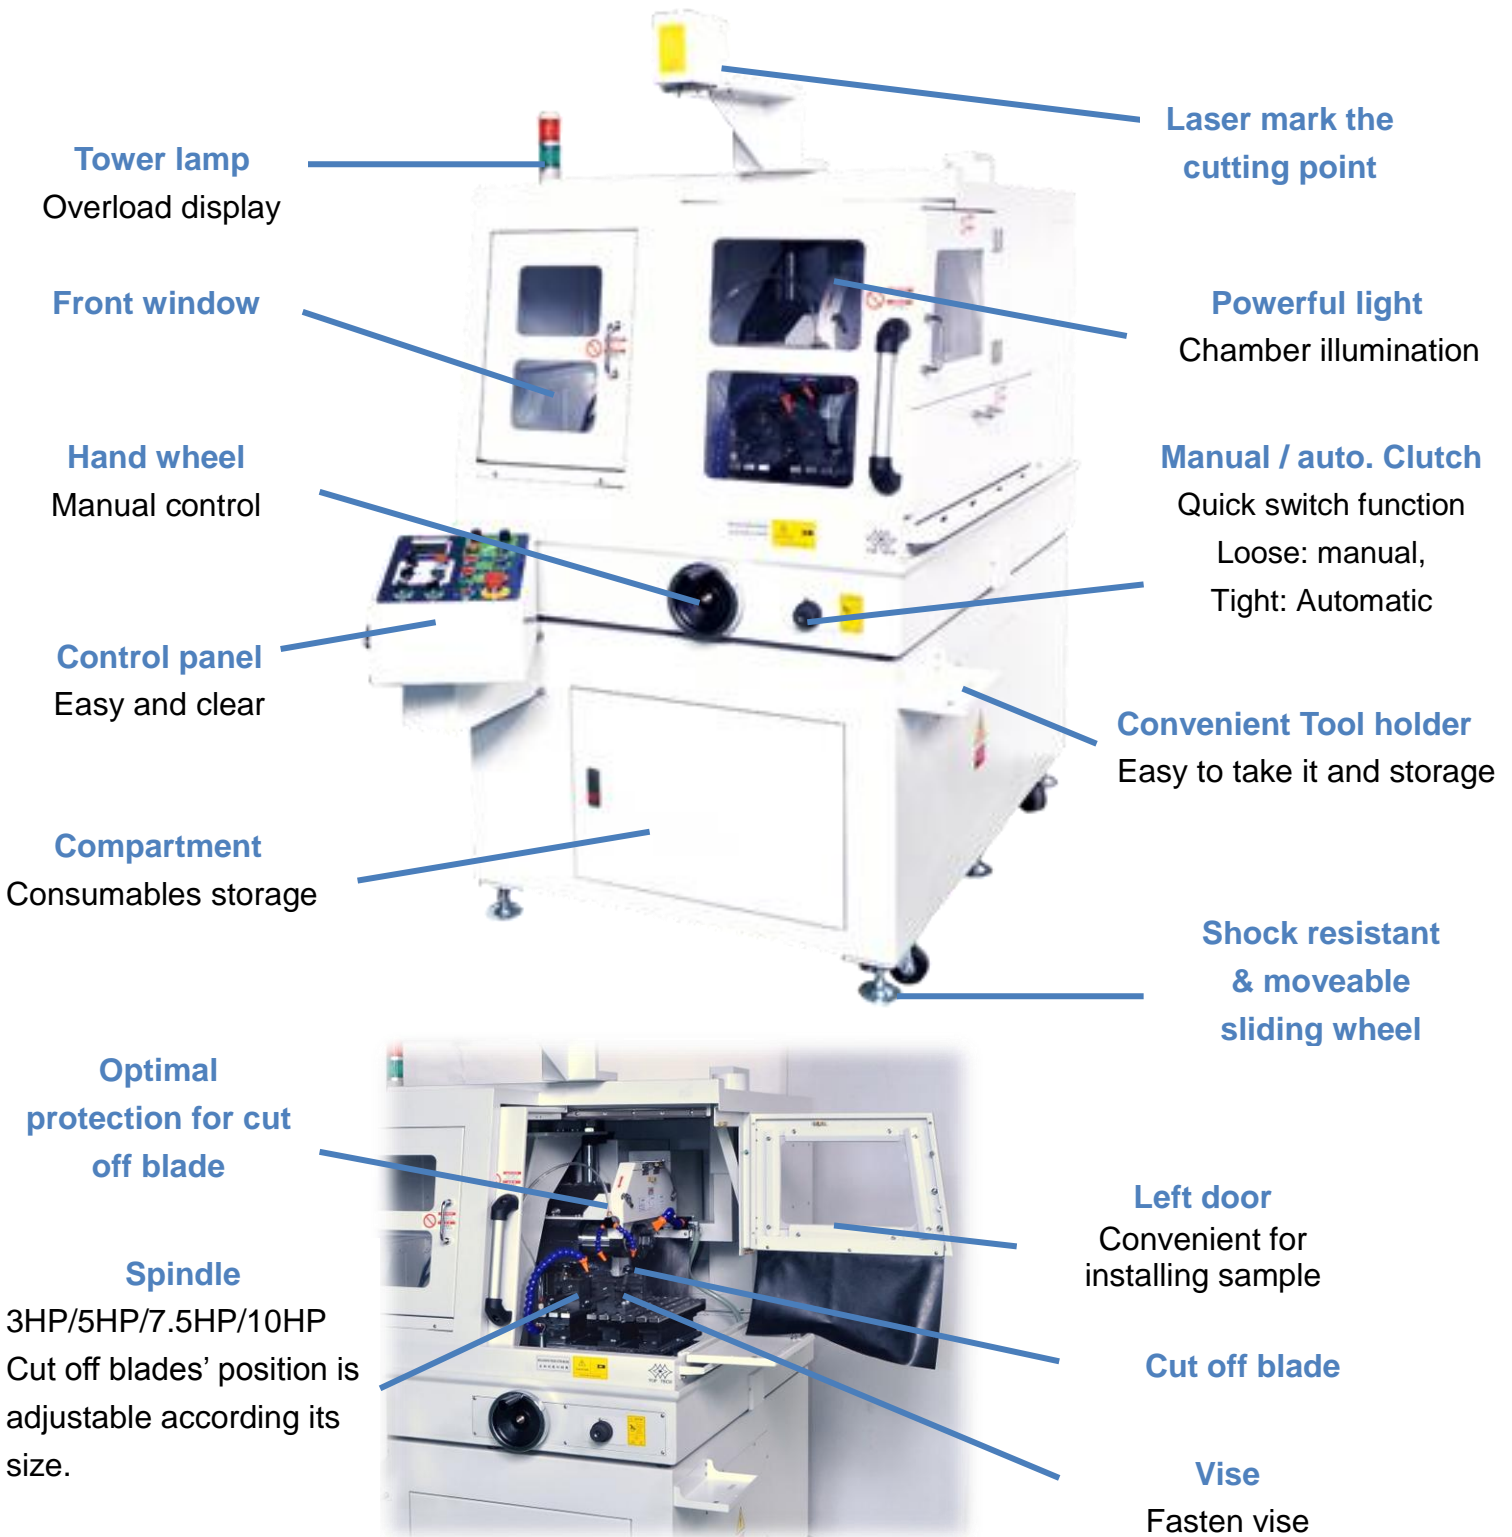

Feature




- Vise table moves horizontal way in 45mm
- T-slot table suitable for various kinds of vise



- Control button—simply, functional, longer life
- Symbol with picture gives clear and easy understanding
- Safety first with E. STOP

- Moveable tank can storage inside or outside
- Tank with anti-drop, sediment function
- Water tank with quick connector
- Coolant level gauge





TOP TECH

Specification

Specification		260F		360F	
Motor power		3HP (2300W)	5HP (3800W)	7.5HP (5600W)	10HP (7500W)
Sample Dim Max.(mm)		Max ϕ 70mm 20t \times 100L	Max ϕ 90mm 25t \times 100L	Max ϕ 90mm 30t \times 150L	Max ϕ 120mm 30t \times 150L
Cut off blade(mm)		Max ϕ 305 \times ϕ 31.75	Max ϕ 355 \times ϕ 32	Max ϕ 406 \times ϕ 32	Max ϕ 406 \times ϕ 32
Feeding rate		0~150 mm/min (Min:25)		0~75 mm/min (Min:25)	
Feeding Method	Auto	Button control. Home point return after cutting			
	Manual	Hand wheel or button control			
Rotational speed		2500 RPM (60Hz) / 2100 RPM (50Hz)			
Cutting depth(X)		260mm	260mm	360mm	360mm
Vertical movement(Z)		80mm		120mm	
Vise		T-slot vise table with left/right separately vises			
Vise capacity (max.)				Right vise table 95x390mm Left vise table 200x390 Open 200MMx85mm	
Horizontal movement		With the right/left vises a movement 45mm in $\leftarrow \rightarrow$ direction			
Cooling		1/4HP-3 ϕ			
Water tank capacity		25gal (100L)		30gal (120L)	
Machine size (WxDxH)		1050x1250x1620mm			
Weight		830kg		900kg	
Power supply		<input type="checkbox"/> AC 220V-3 ϕ <input type="checkbox"/> AC 380V-3 ϕ <input type="checkbox"/> AC 415V-3 ϕ <input type="checkbox"/> AC 440V-3 ϕ (Special voltage can be ordered)			
Optional vise		Acceptable special vise ordered			
Standard accessories		Wrenchx2pcs, cut off bladex2pcs			
		Coolant 5L		Coolant 6L	

We reserve the right of change design without notice.